

ecomax™ 402

by **HOBART**



Technical data

Width / Depth / Height
435 / 530 / 700 mm

Loading height
301 mm

Rack size
385 x 385 mm
396 x 396 mm

Capacity per hour*
up to 40 racks

Cycle times*
90 / 120 sec

Wash / rinse temperature
approx. 60 °C /
approx. 70 °C

Tank capacity / loading
11 litres 2 kW

Fresh water consumption / cycle
2,5 litres

Wash pump
0,25 kW

Booster loading
1,8 (3,7**/5,5***) kW

Total loading
2,2 (4**/5,9***) kW

Rated Voltage
230V / 50Hz / 1, 15A
400V / 50Hz / 3, 16A (field convertible)

* Hot water connection
** 20A
*** 400/50/3

Glasswasher

HIGH PERFORMANCE

BEST RESULTS

- Rotating top and bottom wash system to distribute the wash water evenly over the glasses
- Thermostop-controlled rinse temperature to ensure perfect hygiene result
- Temperature status indicators

EASY TO CLEAN

- Deep-drawn wash tank bottom, no hygiene problems with corners and edges
- Wash and rinse arms can be removed without tools

ROBUST AND RELIABLE

- Double-walled door and solid suspension guarantee reliable operation in daily use
- Regular quality controls of all parts


EASY TO USE

- Simple to handle
- Controls are easy to understand
- Loading height above average: 301mm, for easy loading of extra high glasses

EASY TO SERVICE

- Easy access
- Drain pump and detergent dispenser can be retrofitted

- Double-walled insulated front door
- Automatic control of the rinse cycle
- Integrated rinse agent dispenser
- Heater with thermostatic control
- Incl. electrical cable and flexible water supply hose and drain hose
- Back panel
- Convertible from 230V/50Hz/1 to 400V/50Hz/3 at site

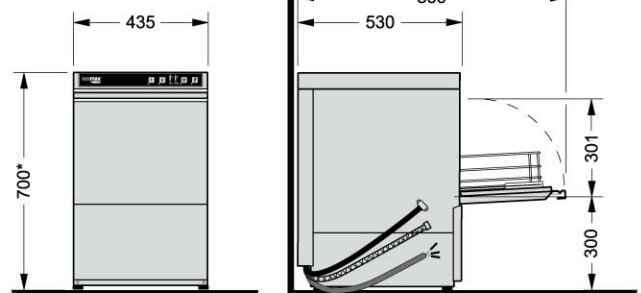

* +/- 20 mm adjustable feet

