

ecomax™ 502

by **HOBART**



Technical data

Width / Depth / Height
575 / 600 / 830 mm

Loading height
356 mm

Rack size
500 x 500 mm

Capacity per hour*
up to 60 racks
(1080 plates)

Cycle times*
60 / 180 sec

Wash / rinse temperature
approx. 60 °C /
approx. 82 °C

Tank capacity / loading
25 litres 2 kW

Fresh water consumption / cycle
2,9 litres

Wash pump
0,37 kW

Booster loading
3,6 (5,5)** kW

Total loading
4,2 (6)** kW

Rated Voltage
230V / 50Hz / 1, 20A
400V / 50Hz / 3, 16A (field convertible)

* Hot water connection
** 400/50/3

Undercounter Dishwasher

HIGH PERFORMANCE

BEST RESULTS

- Rotating top and bottom wash system to distribute the wash water evenly over the dishes
- Thermostop-controlled rinse temperature to ensure perfect hygiene result
- Temperature status indicators

EASY TO CLEAN

- Deep-drawn wash tank bottom, no hygiene problems with corners and edges
- Wash and rinse arms can be removed without tools

ROBUST AND RELIABLE

- Double-walled door and solid suspension guarantee reliable operation in daily use
- Regular quality controls of all parts

EASY TO USE

- Simple to handle
- Controls are easy to understand
- Loading height above average: 356mm


EASY TO SERVICE

- Easy access
- Drain pump and detergent dispenser can be retrofitted

- Double-walled insulated front door
- Automatic control of the rinse cycle
- Integrated rinse agent dispenser
- Heater with thermostatic control
- Incl. electrical cable and flexible water supply hose and drain hose
- Back panel
- Convertible from 230V/50Hz/1 to 400V/50Hz/3 at site

Hobart International (Singapore) Pte Ltd

84 Genting Lane #07-01 Cityneon Design Centre Singapore 349584
Tel: (65) 6846 7117 Fax: (65) 6846 0991
enquiry@hobart.com.sg
www.hobart.com.sg

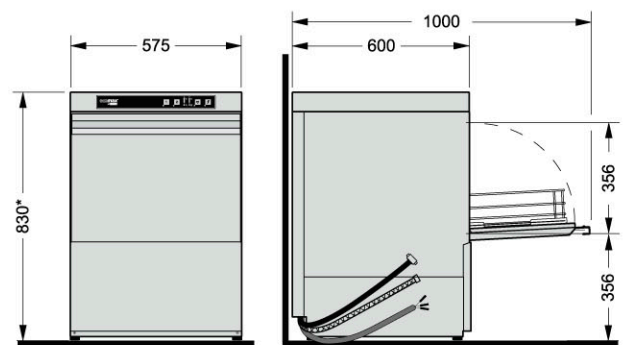

* +/- 20 mm adjustable feet

