



型号: H600

电压: 380(220)V/50(60)Hz/3/(N)/PE

| | | |
|------------------|----------------|-------|
| 审核: 赵磊 | 日期: 2016.01.05 | 页数: 2 |
| 绘制: 刘振 | 日期: 2016.01.05 | 页数: 5 |
| 物料号: 7160750-001 | 版本: F | |

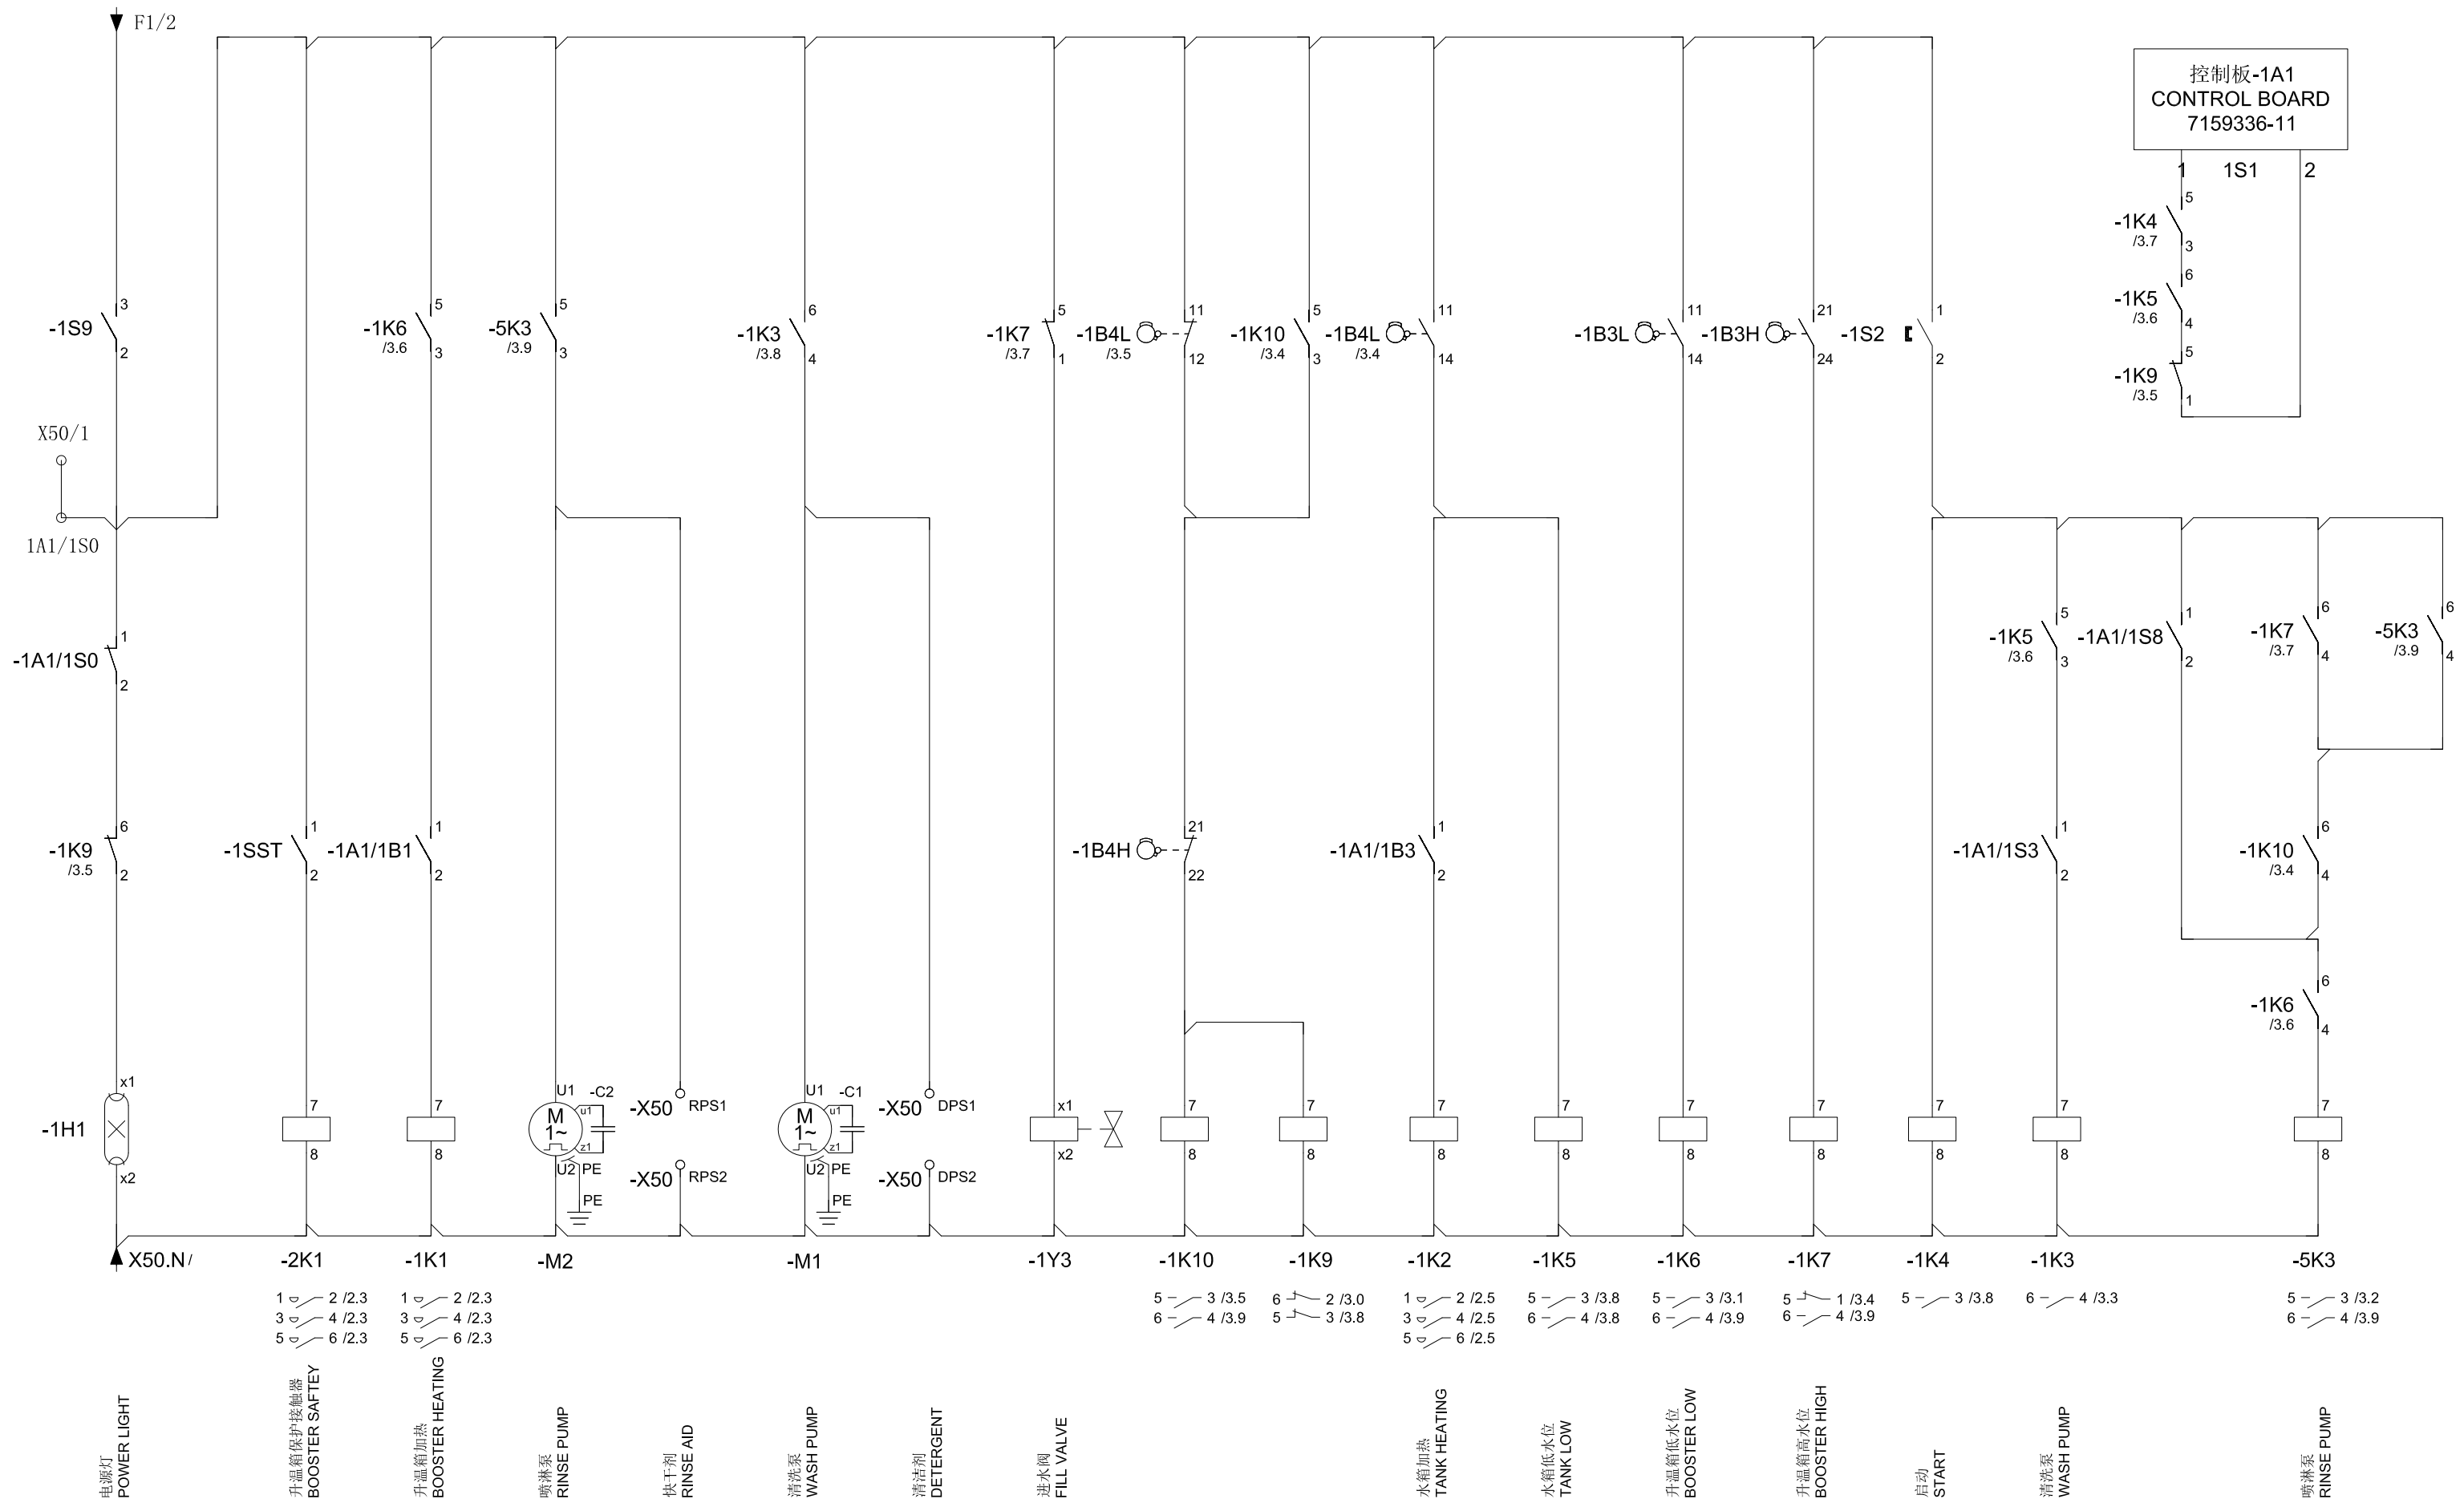

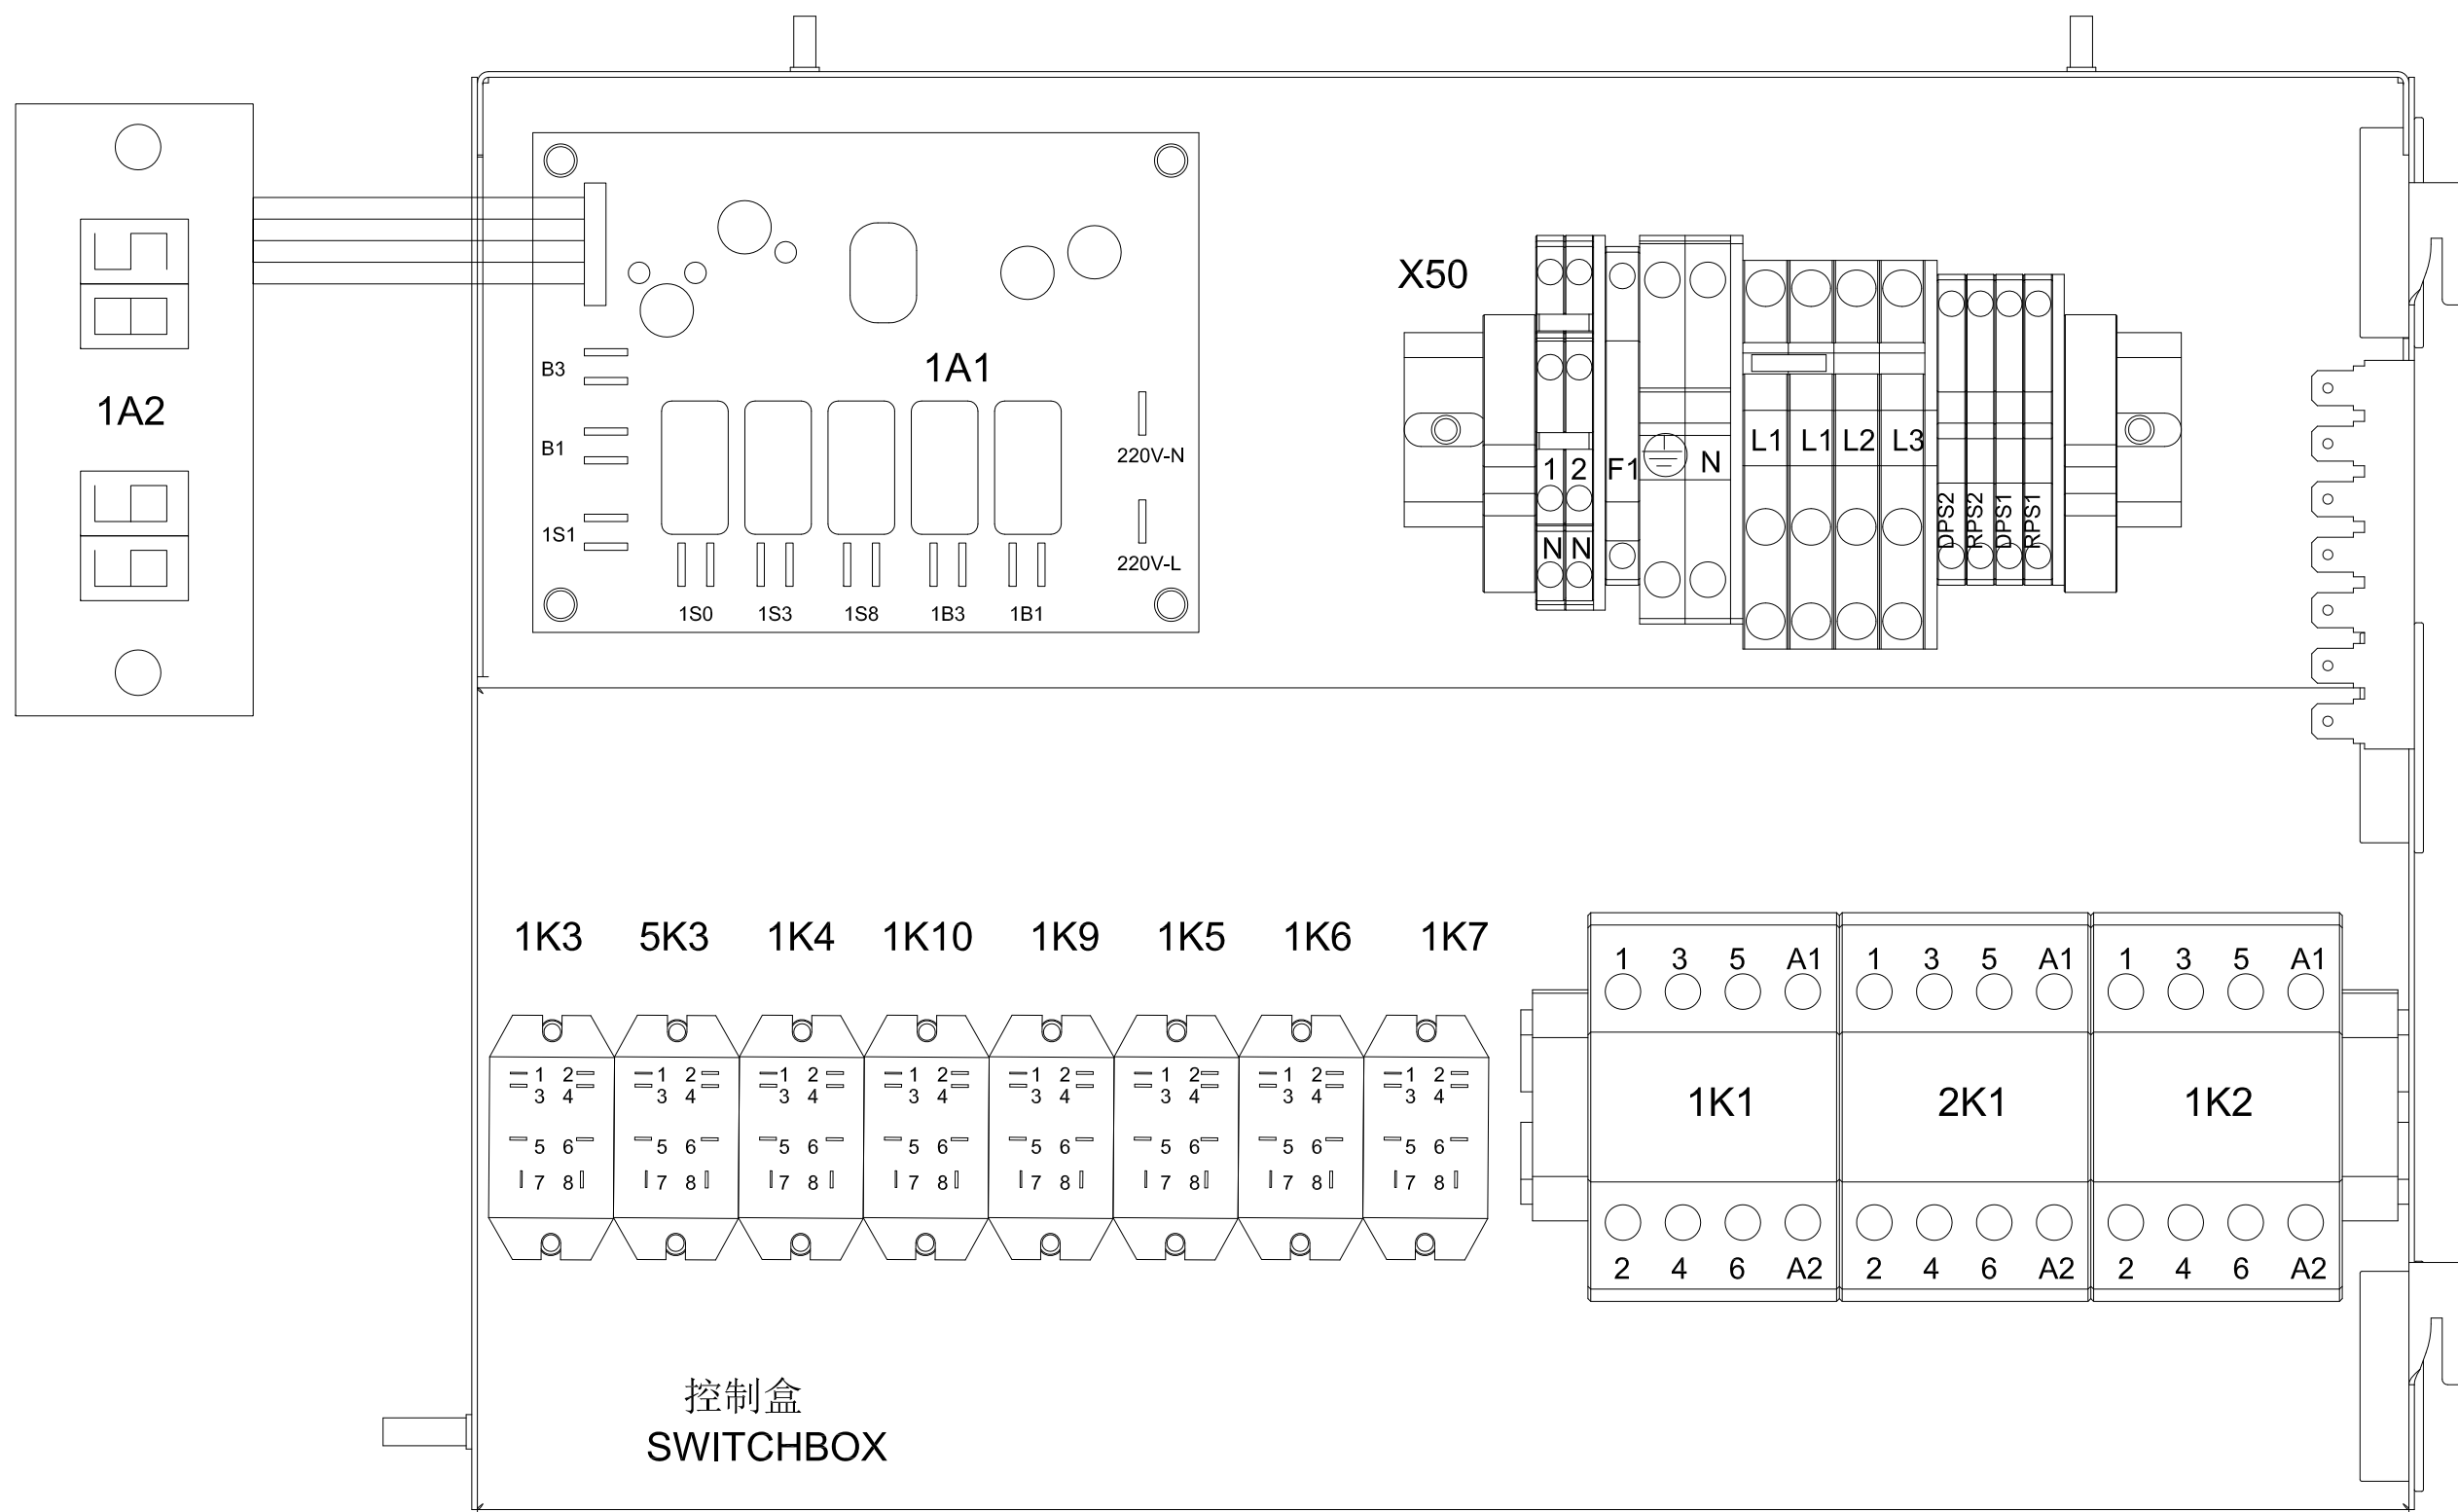

电路和接地连接必须符合国家电力法规中适用的条款和其它当地电力法规。
 在本机器的供电线路中必须为本机器安装独立的带漏电保护器的全极断开装置。
ELECTRICAL AND GROUNDING CONNECTIONS MUST COMPLY WITH THE APPLICABLE PORTIONS OF THE NATIONAL ELECTRICAL CODE AND/OR OTHER LOCAL ELECTRICAL CODES.
A FUSED DISCONNECTS OR CIRCUIT BREAKER WITH ELECTRICAL LEAKING PROTECTOR (NOT SUPPLIED) MUST BE INSTALLED IN THE ELECTRICAL LINE SUPPLYING THE DISHWASHER AND SHOULD MEET THE REQUIREMENTS OF LOCAL ELECTRICAL CODE.

| 序号 POS. | 数量 QUANT. | 参考 REFERENCE | 技术数据 TECHNICAL DATA | 零件名称 PART UNIT |
|------------|--------------|-----------------|------------------------|-----------------------------------|
| 1 | 1A1 | 7159336-11 | | 控制板 CONTRO UNIT |
| 2 | 1A2 | 7159336-16 | | 操作面板 OPERATION PANEL (BAE) |
| 3 | B1 | 00-775612-001 | | 温度传感器 TEMPERATURE PROBE |
| 4 | B2 | 00-775612-001 | | 温度传感器 TEMPERATURE PROBE |
| 5 | B3 | 7160693-001 | BOOSTER-45/30-110/90 | 压力变送器 PRESSURE TRANSMITTER |
| 6 | B4 | 7160693-002 | TANK-45/30-65/48 | 压力变送器 PRESSURE TRANSMITTER |
| 7 | E1 | 7160717-001 | 380V/12000W | 升温箱电热管 HEATING ELEMENT BOOSTER |
| 8 | E2 | 7160692-001 | 220V/2000W | 水箱电热管 HEATING ELEMENT TANK |
| 9 | E2 | 7160692-002 | 220V/3000W | 水箱电热管 HEATING ELEMENT TANK |
| 10 | 1K1 | 743402 | 380V/12000W HEATER | 接触器 CONTACTOR |
| 11 | 2K1 | 743402 | 380V/12000W HEATER | 接触器 CONTACTOR |
| 12 | 1K1 | 743401 | 220V/12000W HEATER | 接触器 CONTACTOR |
| 13 | 2K1 | 743401 | 220V/12000W HEATER | 接触器 CONTACTOR |
| 14 | 1K2 | 743402 | | 接触器 CONTACTOR |
| 15 | M1 | 02-883617-001 | 50Hz | 清洗泵 WASHPUMP |
| 16 | M1 | 02-883617-002 | 60Hz | 清洗泵 WASHPUMP |
| 17 | M2 | 00-775854-001 | 50Hz | 喷淋泵 RINSEPUMP |
| 18 | M2 | 00-775854-002 | 60Hz | 喷淋泵 RINSEPUMP |
| 19 | 1S9 | 743429 | | 开关 SWITCH |
| 20 | 1S2 | 02-229517-002 | | 开关 SWITCH |
| 21 | X50 | 7160751-001 | 380V/3P | 端子排 Terminal |
| 22 | X50 | 7159036 | 220V/3P | 端子排 Terminal |
| 23 | 1SST | 926189 | 95℃ | 极限温控 TEMP. SAFETY |
| 24 | W 1.0 | 743427 | | 电源线 CONNECTION CABLE |
| 25 | Y1 | 7160727-001 | | 电磁阀 SOLENOID VALVE |
| 26 | 1K3 | 7160583-002 | | 继电器 RELAY |
| 27 | 5K3 | 7160583-002 | | 继电器 RELAY |
| 28 | 1K4 | 7160583-002 | | 继电器 RELAY |
| 29 | 1K10 | 7160583-002 | | 继电器 RELAY |
| 30 | 1K9 | 7160583-002 | | 继电器 RELAY |
| 31 | 1K5 | 7160583-002 | | 继电器 RELAY |
| 32 | 1K6 | 7160583-002 | | 继电器 RELAY |
| 33 | 1K7 | 7160583-002 | | 继电器 RELAY |
| 34 | -- | 7160752-001 | 380V MACHINE | 控制线束 CONTROL WIRING HARNESS |
| 35 | -- | 7160752-002 | 220V MACHINE | 控制线束 CONTROL WIRING HARNESS |